


BOILERSPECTION SD

Infrared camera system for continuous temperature measurement and monitoring in boilers and furnaces from 500 to 1600°C (932 to 2912°F).

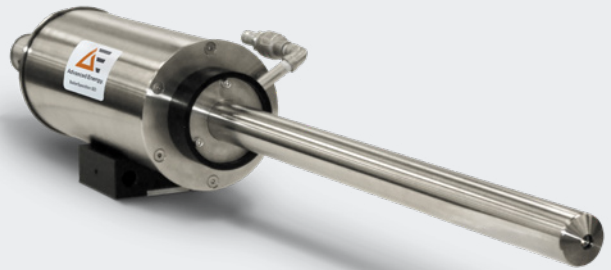


The BoilerSpection™ SD thermal imaging system provides continuous, real-time, through-flame imaging plus is resilient and robust enough to withstand the harshest conditions. Plant operators need a view inside the boiler, furnace or kiln to increase efficiency, improve emissions, and lower operating costs.


BoilerSpection includes state-of-the-art optics, infrared cameras, an auto-retraction device, networking components and software to control the entire system remotely. The LumaSpec RT software is a powerful tool for analysis and historical trending, outputs to automation and DCS, along with a real-time web server to broadcast images over the plant's network.

PRODUCT HIGHLIGHTS

- Capture lost boiler capacity by reducing unnecessary cleanings
- Increase efficiency by improving heat transfer with precise knowledge of slag and ash buildup
- Lower maintenance costs by optimizing cleaning and identifying large deposits (clinkers) before they cause damage to boiler tubes
- Optimize fuel-switching by directly and accurately measuring ash rate and uniformity as fuel changes
- Manage combustion by tracking uniformity of ash deposits

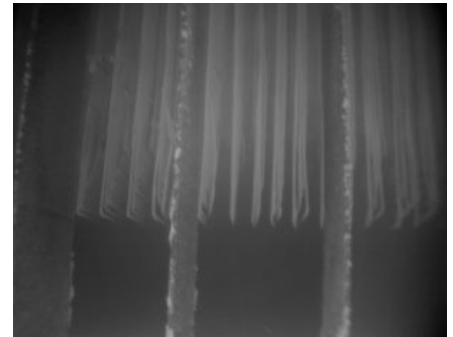

Infrared image from BoilerSpection SD system in grayscale color palette

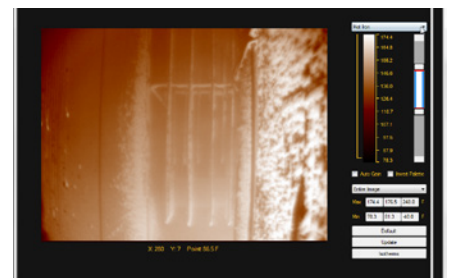

Infrared image in LumaSpec RT software

TECHNICAL DATA

Infrared Camera Specifications	
Wavelength	Narrowband 3.9 μm
Resolution	320 x 240
Detector Type	Uncooled focal plane array VOx microbolometer
Protective Housing	IP66 with integrated vortex air cooling
Measurement Range	500 to 1600°C (932 to 2912°F)
Ambient Environment	Up to 60°C (140°F)
Camera Weight	13.5 kg (30 lbs)

Lens Specifications	
Construction	Stainless steel with air cooling purge
Field of View (H x V)	50° x 38°
Focus	Manual
Protection	Sapphire window tip with air purge shield
Diameter	42 mm (1.65")

Facility Connection Requirements	
Power	110 to 240 VAC, two 15 amp lines to support six cameras
Electrical Cabinets	All cabinets/panels are NEMA 4 / IP65
Air Supply	20 to 30 scfm @ min 80 psi per camera


Automatic Retraction Device and Mounting	
Controls	Automated retraction if air or power is disrupted
Air Filters	Two-stage filter system
Air Regulators	Included
Mounting	Weld or bolt on mounting plates
Waterwall Opening	50 mm (2") gap
Weld-On Thru Hole	64 mm (2.5") circle
Furnace Pressure	Negative, balanced, or positive pressure

Networking Specifications	
Number of Cameras	Up to 24 with a single controller
Camera Connection	100 Base T Ethernet
Field Switch Cabinet	NEMA 4 / IP66 enclosure with ethernet switch
Connection to Control Room	Fiber Optic Link, 50/125 μm core/cladding diameter multi-mode fiber, 850/1310 nm wavelength

Available Options

- LumaSpec RT web server functionality for remote broadcasting of data over plant network(s)
- I/O outputs and relay outputs for DCS, PLC, or connection to trigger cleaning equipment
- Interface for 3rd party plant historical archiving programs
- OPC and Modbus Support (Serial and IP)
- RAID memory systems
- Service offerings: installation, maintenance, and training

BOILERSPECTION SD DIMENSIONS

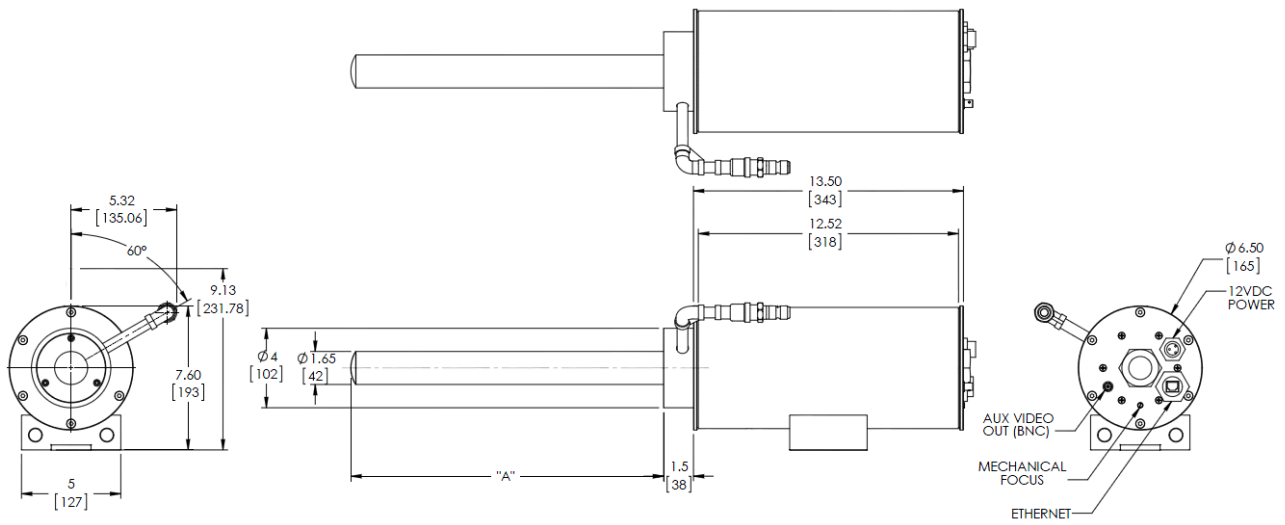

All dimensions in mm

SYSTEM INSTALLATION


The BoilerSpection system can be installed and commissioned either while the boiler is operating or during an outage. The camera system mounts to the furnace wall via a mounting plate. Advanced Energy offers a choice of weld-on or bolt-on mounting plates. Exact dimensions can be customized by request.

The standard BoilerSpection system has the following requirements:

- Facility connections
- Ports with a 2" (50 mm) clearance
- Less than 330' (100 m) distance between cameras and the field switch cabinet
- Less than 820' (250 m) distance from field switch cabinet and control room
- Instrument grade air



BOILERSPECTION SYSTEM CONFIGURATION

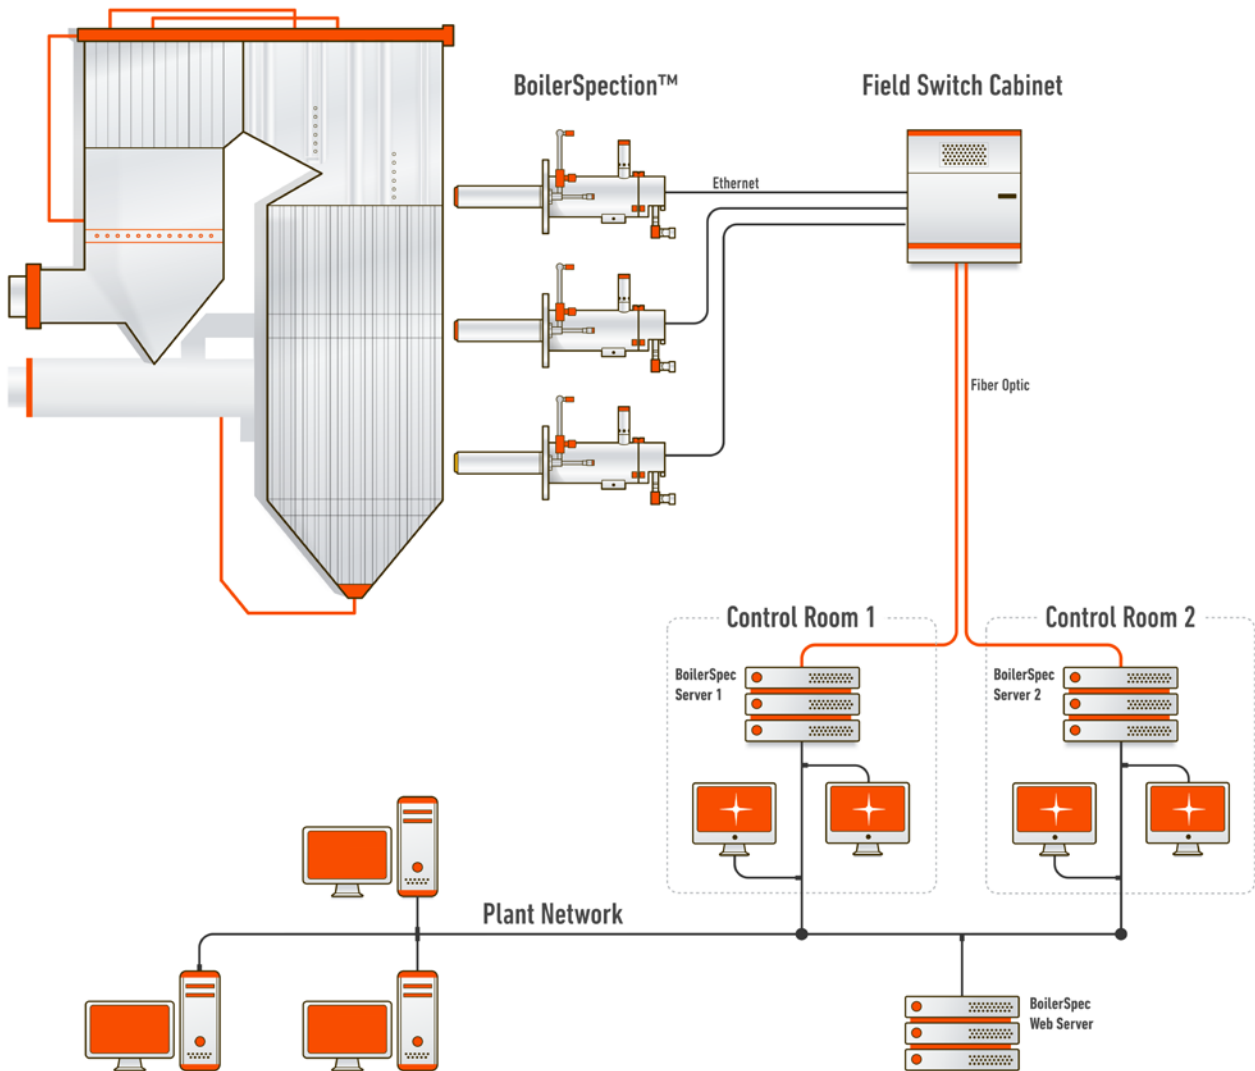

For international contact information,
visit advancedenergy.com.

sales.support@aei.com
+1 970 221 0108

PRECISION | POWER | PERFORMANCE

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2019 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy®, BoilerSpection™, LumaSpec™, and AE® are U.S. trademarks of Advanced Energy Industries, Inc.