


# ARTESYN

## AVD120-48S12 Series

### 120 Watts Sixteenth-brick Converter

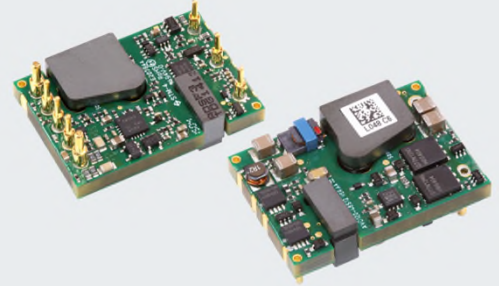

#### PRODUCT DESCRIPTION

Advanced Energy's Artesyn AVD120-48S12 is a single output DC/DC converter with standard sixteenth-brick outline and pin configuration. It delivers up to 10A output current with 12V output voltage. Above 93% ultra-high efficiency and excellent thermal performance makes it an ideal choice to supply power in telecom and datacom.

#### AT A GLANCE

##### Total Power

120 Watts

##### Input Voltage

36 to 75 Vdc

##### # of Outputs

Single

#### SPECIAL FEATURES

- Delivering up to 10A output
- Ultra-high efficiency 93% typ. at full load
- Wide input range: 36V ~ 75V
- Excellent thermal performance
- No minimum load requirement
- Basic isolation
- High power density
- Low output noise
- RoHS 3.0

#### SAFETY

- UL UL/CSA 60950-1
- TUV EN 62368-1
- CE EN 62368-1

#### TYPICAL APPLICATIONS

- Telecom
- Datacom



## MODEL NUMBERS

Standard	Output Voltage	Structure	Pin	Package	ROHS
AVD120-48S12TL	12Vdc	Open-frame	Bullet pin SMT	Tape reel	RoHS 3.0
AVD120-48S12-6L	12Vdc	Open-frame	Through hole	Tray	RoHS 3.0
AVD120-48S12B-6L	12Vdc	Baseplate	Through hole	Tray	RoHS 3.0
AVD120-48S12B-4L	12Vdc	Baseplate	Through hole	Tray	RoHS 3.0

### Order Information

AVD120	-	48	S	12		B	-	6	L
①		②	③	④	⑤	⑥		⑦	⑧

①	Model series	AVD: high efficiency sixteenth brick series, 120: output power 120W
②	Input voltage	48: 36V ~ 75V input range, rated input voltage 48V
③	Output number	S: single output
④	Rated output voltage	12: 12V output
⑤	Remote ON/OFF logic	Default: negative logic; P: positive logic
⑥	Baseplate	B: with baseplate; default: open-frame
⑦	Pin length	T: SMT, 4: 4.8mm, 6: 3.8mm Through Hole
⑧	RoHS status	L: RoHS 3.0

### Options

None

## ELECTRICAL SPECIFICATIONS

### Absolute Maximum Ratings

Stress in excess of those listed in the “Absolute Maximum Ratings” may cause permanent damage to the power supply. These are stress ratings only and functional operation of the unit is not implied at these or any other conditions above those given in the operational sections of this TRN. Exposure to any absolute maximum rated condition for extended periods may adversely affect the power supply’s reliability.

Table 1. Absolute Maximum Ratings						
Parameter	Model	Symbol	Min	Typ	Max	Unit
Input Voltage	Operating -Continuous	All	-	-	80	Vdc
	Non-operating -100mS	All	-	-	100	Vdc
Maximum Output Power	All	$P_{O,max}$	-	-	120	W
Isolation Voltage <sup>1</sup>	Input to output	All	-	-	1500	Vdc
Ambient Operating Temperature	All	$T_A$	-40	-	+85	°C
Storage Temperature	All	$T_{STG}$	-55	-	+125	°C
Voltage at remote ON/OFF pin	All		-0.3	-	5	Vdc
Humidity (non-condensing)	Operating	All	-	-	95	%
	Non-operating	All	-	-	95	%

Note 1 - 1mA for 60s, slew rate of 1500V/10s. Basic insulation, pollution degree 2

## ELECTRICAL SPECIFICATIONS

### Input Specifications

Table 2. Input Specifications						
Parameter	Conditions <sup>1</sup>	Symbol	Min	Typ	Max	Unit
Operating Input Voltage, DC	All	$V_{IN,DC}$	36	48	75	Vdc
Turn-on Voltage Threshold		$V_{IN,ON}$	31		36	Vdc
Turn-off Voltage Threshold		$V_{IN,OFF}$	30		35	Vdc
Lockout Voltage Hysteresis			1		3	V
Maximum Input Current ( $I_O = I_{O,max}$ )	$V_{IN,DC} = 36Vdc$	$I_{IN,max}$	-	-	4.5	A
Recommended Input Fuse	Fast blow external fuse recommended		-	-	8	A
Recommended External Input Capacitance	Low ESR capacitor recommended	$C_{IN}$	100	-	-	uF
Input Reflected Ripple Current	Through 12uH inductor			60	-	mA
Operating Efficiency	$T_A = 25\text{ }^{\circ}C$ $I_O = I_{O,max}$ $I_O = 50\% I_{O,max}$	$\eta$	-	93 92.5	-	% %

Note 1 -  $T_A = 25\text{ }^{\circ}C$ , airflow rate = 400 LFM,  $V_{in} = 48Vdc$ , nominal  $V_{out}$  unless otherwise noted.

## ELECTRICAL SPECIFICATIONS

## Output Specifications

Table 3. Output Specifications							
Parameter	Conditions <sup>1</sup>	Symbol	Min	Typ	Max	Unit	
Factory Set Voltage	$V_{IN,DC} = 48Vdc$ $I_O = I_{O,max}$	$V_O$	11.8	11.95	12.2	Vdc	
Total Regulation	Over sample, line, load, temperature & life	$V_O$	11.8	11.95	12.2	Vdc	
Output Voltage Line Regulation	All	$\%V_O$	-	-	$\pm 0.2$	%	
Output Voltage Load Regulation	All	$\%V_O$	-	-	$\pm 0.5$	%	
Output Voltage Temperature Regulation	All	$\%V_O$	-	-	0.02	%/°C	
Output Voltage Trim Range	All	$V_O$	9.6	-	13.2	V	
Output Ripple, pk-pk	Measure with a 1uF ceramic capacitor in parallel with a 10uF tantalum capacitor, 0 to 20MHz bandwidth	$V_O$	-	50	-	mV <sub>PK-PK</sub>	
Output Current	All	$I_O$	0	-	10	A	
Output DC Current-limit Inception <sup>2</sup>	All		11	-	20	A	
$V_O$ Load Capacitance <sup>3</sup>	All	$C_O$	220	470	4700	uF	
$V_O$ Dynamic Response	Peak Deviation Settling Time	25%~50%~25% & 50%~75%~50% slew rate = 0.1A/us	$\pm V_O$	-	-	60	mV
		25%~50%~25% & 50%~75%~50% slew rate = 1A/us	$T_s$	-	-	200	uSec
Turn-on Transient	Rise time	$I_O = I_{O,max}$	$T_{rise}$	-	-	50	mS
	Turn-on delay time		$T_{turn-on}$	-	-	100	mS
	Output voltage overshoot		$\%V_O$	-	-	5	%
Switching Frequency	All	$f_{sw}$	230	240	250	KHz	
Remote ON/OFF control (Positive logic)	Off-state voltage	All	-0.3	-	1.2	V	
	On-state voltage	All	3.5	-	5	V	
Remote ON/OFF control (Negative logic)	Off-state voltage	All	3.5	-	5	V	
	On-state voltage	All	-0.3	-	1.2	V	

Note 1 -  $T_a = 25^\circ C$ , airflow rate = 400 LFM,  $V_{in} = 48Vdc$ , nominal  $V_{out}$  unless otherwise noted.

Note 2 - Hiccup: auto-restart when over-current condition is removed.

Note 3 - High frequency and low ESR is recommended.

## ELECTRICAL SPECIFICATIONS

### Output Specifications

Table 3. Output Specifications Con't						
Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Output over-voltage protection (Static) <sup>4</sup>	All	V <sub>O</sub>	13.5	-	18	V
Output over-voltage protection (Dynamic) <sup>4</sup>	All	V <sub>O</sub>	13.5	-	19	V
Output over-temperature protection <sup>5</sup>	All	T	110	125	135	°C
Over-temperature hysteresis	All	T	-	5	-	°C
MTBF	Telcordia SR-332-2006; 80% load, 300LFM, 40 °C T <sub>A</sub>		-	2.0	-	10 <sup>6</sup> h

Note 4 - Hiccup: auto-restart when over-voltage condition is removed.

Note 5 - Auto recovery. See Figure 10,11 test point.

# ELECTRICAL SPECIFICATIONS

## AVD120-48S12 Performance Curves

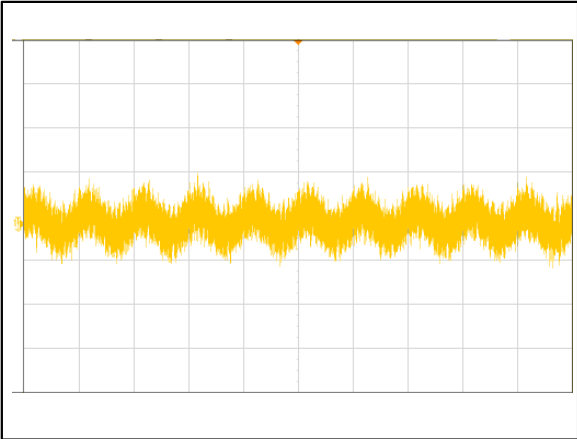


Figure 1: AVD120-48S12 Input Reflected Ripple Current Waveform  
Ch 1: lin (20uS/div, 20mA/div)

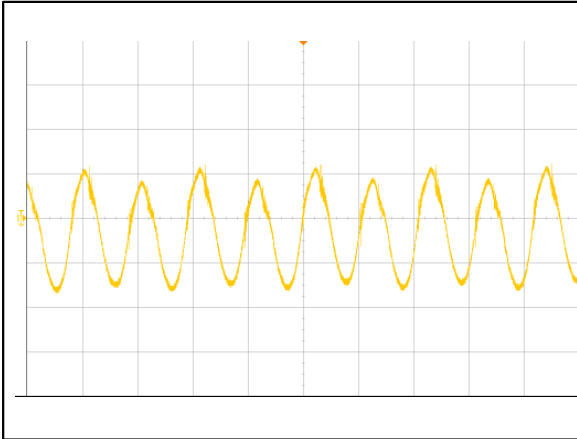


Figure 2: AVD120-48S12 Ripple and Noise Measurement  
Ch 1: Vo (2uS/div, 20mV/div)

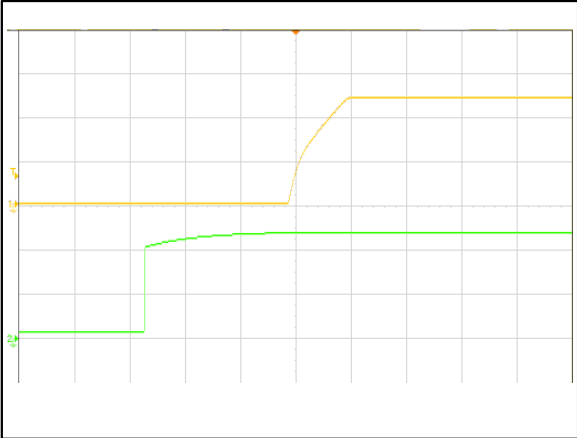


Figure 3: AVD120-48S12 Output Voltage Startup Characteristic (20mS/div)  
Ch 1: Vo (5V/div) Ch 2: Vin (20V/div)

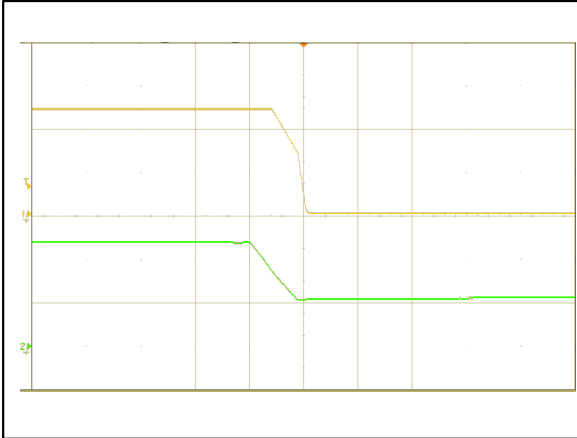


Figure 4: AVD120-48S12 Turn Off Characteristic (1mS/div)  
Ch 1: Vo (5V/div) Ch 2: Vin (20V/div)

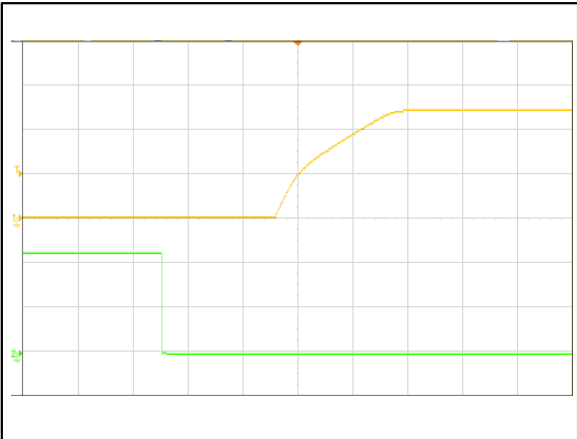


Figure 5: AVD120-48S12 Remote ON Waveform (10mS/div)  
Ch 1: Vo (5V/div) Ch 2: Remote ON (2V/div)

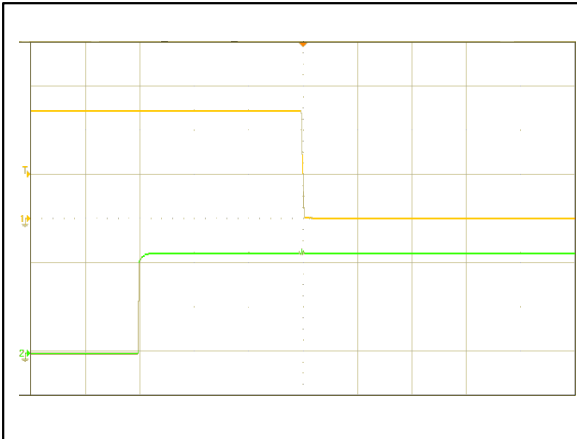


Figure 6: AVD120-48S12 Remote OFF Waveform (5mS/div)  
Ch 1: Vo (5V/div) Ch 2: Remote ON (2V/div)

# ELECTRICAL SPECIFICATIONS

## AVD120-48S12 Performance Curves

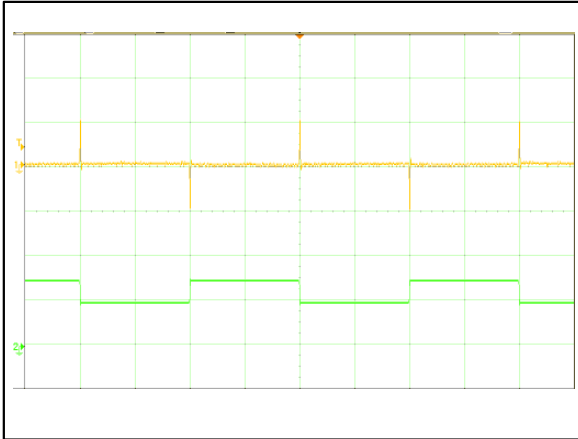


Figure 7: AVD120-48S12 Transient Response (2mS/div)  
 50%~75%~50% load change, 0.1A/uS slew rate  
 Ch 1: Vo (50mV/div) Ch 2: Io (5A/div)

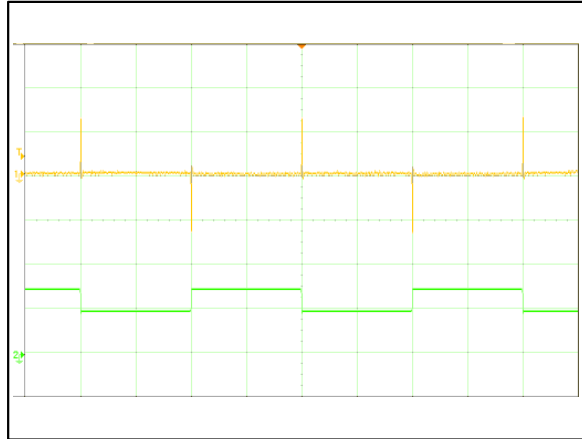


Figure 8: AVD120-48S12 Transient Response (2mS/div)  
 50%~75%~50% load change, 1A/uS slew rate  
 Ch 1: Vo (50mV/div) Ch 2: Io (5A/div)

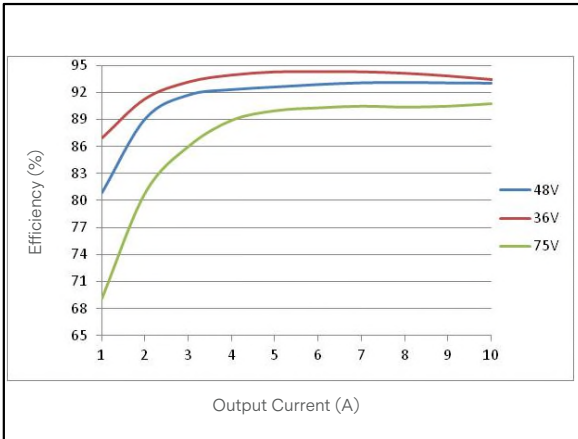


Figure 9: AVD120-48S12 Efficiency Curves @ 25 °C, 200LFM, Vo=12V  
 Loading: Io = 10% increment to 10A

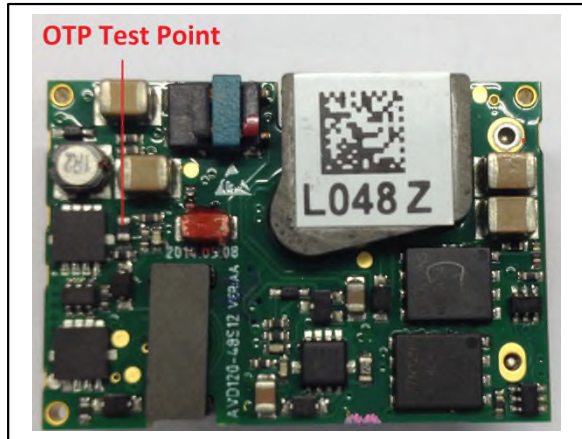


Figure 10: AVD120-48S12 OTP Test Point

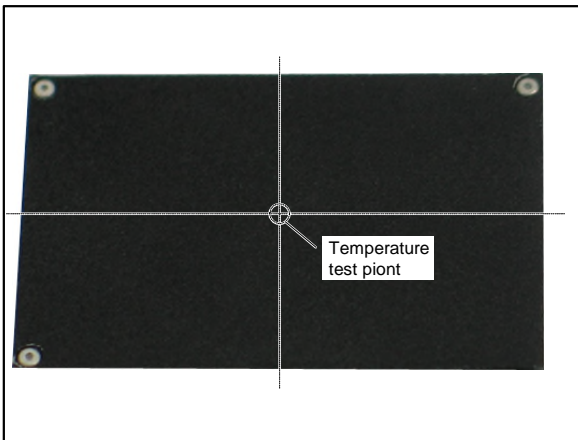



Figure 11: AVD120-48S12B OTP Test Point



# MECHANICAL SPECIFICATIONS

## Mechanical Outlines – Surface Mounted Module

AVD120-48S12TL

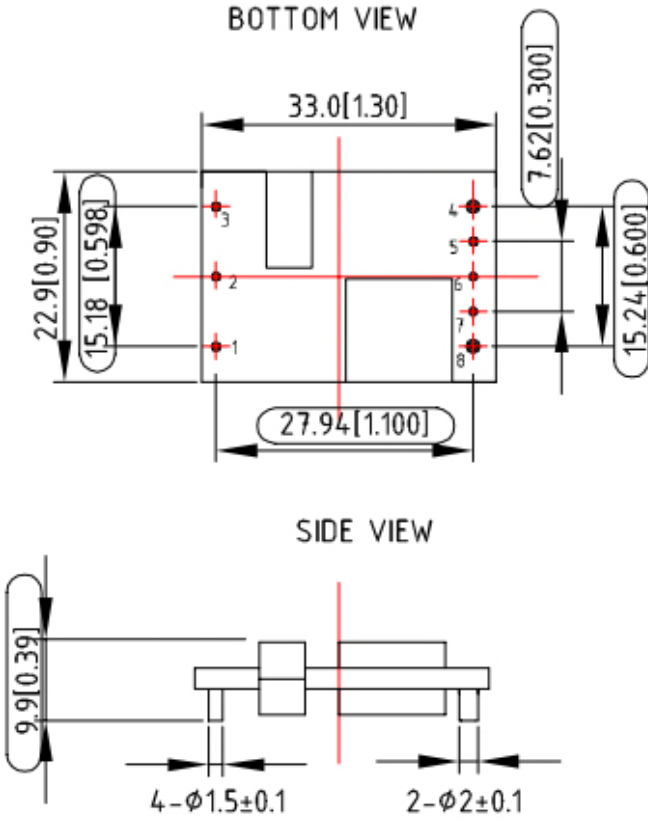


UNIT: mm[inch]                      BOTTOM VIEW: pin on upside  
TOLERANCE: X.Xmm±0.5mm[X.XX in.±0.02in.]  
                  X.XXmm±0.25mm[X.XXX in.±0.01in.]



# MECHANICAL SPECIFICATIONS

## Mechanical Outlines – Baseplate Module

AVD120-48S12B-6L

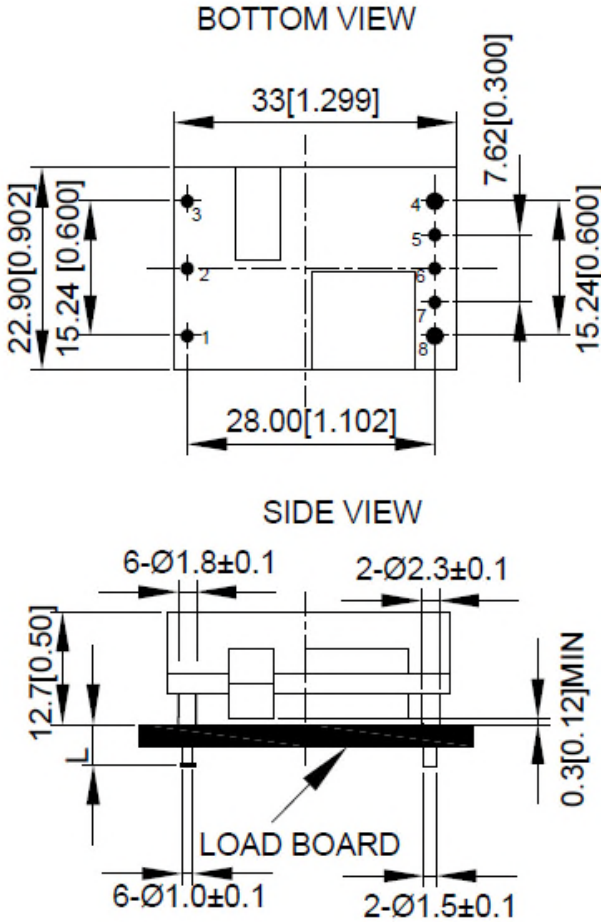

UNIT: mm[inch]                      BOTTOM VIEW: pin on upside  
 TOLERANCE: X.Xmm±0.5mm[X.XX in.±0.02in.]  
 X.XXmm±0.25mm[X.XXX in.±0.01in.]

Note: Depth penetration into base plate, of M3 screws used at baseplate mounting holes, not to exceed maximum of 3.0mm

## MECHANICAL SPECIFICATIONS

### Pin length option

Device code suffix	L
-4	4.8mm ± 0.25mm
-6	3.8mm ± 0.25mm
-8	2.8mm ± 0.25mm
None	5.8mm ± 0.25mm

### Pin Designations

Pin No	Name	Function
1	Vin+	Positive input voltage
2	Remote On/Off	Remote control
3	Vin-	Negative input voltage
4	Vo-	Negative output voltage
5	S-	Negative remote sense
6	Trim	Output voltage trim
7	S+	Positive remote sense
8	Vo+	Positive output voltage

## MECHANICAL SPECIFICATIONS

### Weight

25g typical for baseplate module.

17g typical for open-frame module.

## ENVIRONMENTAL SPECIFICATIONS

### Electromagnetic compatibility Characteristics

AVD120-48S12 power supply is designed to meet the following EMC immunity specifications:

Table 4. Environmental Specifications		
Document	Description	Criteria
EN55022 DC input port, Class A Limits	Conducted Emission	/
IEC/EN 61000-4-2 Enclosure Port, Level 3	Immunity to Electrostatic Discharge	B
IEC/EN 61000-4-6, DC input port, Level 2	Immunity to Continuous Conducted Interference	A
IEC/EN 61000-4-4 DC input port, Level3	Immunity to Electrical Fast Transient	B
IEC/EN 61000-4-5 DC input port Line to Ground(earth): 600V Line to Line: 600V	Immunity to Surges	B
EN61000-4-29 DC input port	Immunity to Voltage Dips and Short Interruptions and Voltage Variations	B

Criterion A: Normal performance during and after test.

Criterion B: For EFT and surges, low-voltage protection or reset is not allowed. Temporary output voltage fluctuation ceases after disturbances ceases, and from which the EUT recovers its normal performance automatically. For Dips and ESD, output voltage fluctuation or reset is allowed during the test, but recovers to its normal performance automatically after the disturbance ceases.

### EMC test conditions

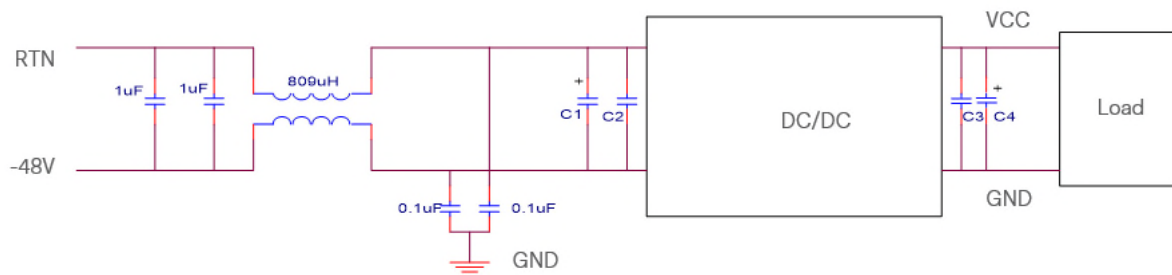


Figure 12 EMC test configuration

C1: 220uF/100V electrolytic capacitor; P/N: UPM2A221MPD (Nichicon) or equivalent caps

C2, C3: 1uF/100V X7R ceramic capacitor, P/N: C3216X7R2A105KT0L0S (TDK) or equivalent caps

C4: 220uF electrolytic capacitor, P/N: UPM1E221MHD (Nichicon) or equivalent caps

Fuse: External fast blow fuse with a rating of 12A. The recommended fuse model is 21612.5P from LITTLEFUSE.

## ENVIRONMENTAL SPECIFICATIONS

### Safety Certifications

The AVD120-48S12 power supply is intended for inclusion in other equipment and the installer must ensure that it is in compliance with all the requirements of the end application. This product is only for inclusion by professional installers within other equipment and must not be operated as a stand alone product.

Table 5. Safety Certifications for AVD120-48S12 power supply system		
Standard	Agency	Description
UL 60950-1, 2nd Edition, 2014-10-14; CAN/CSA C22.2 No. 60950-1-07, 2nd Edition, 2014-10	UL+CUL	US and Canada Requirements
EN 62368-1:2014/A11:2017	TUV-SUD	European Requirements
EN 62368-1:2014/A11:2017	CE	CE Marking

# ENVIRONMENTAL SPECIFICATIONS

## Operating Temperature

The AVD120 series power supplies will start and operate within stated specifications at an ambient temperature from -40 °C to 85 °C under all load conditions. The storage temperature is -55 °C to 125 °C

## Thermal Considerations – Open-Frame module

The converter is designed to operate in different thermal environments and sufficient cooling must be provided. Proper cooling can be verified by measuring the temperature at the test points as shown in the figure 13. The temperature at these test points should not exceed the maximum values in Table 6.

For a typical application, forced airflow direction is from Vin- to Vin+, Figure 14 shows the derating of output current vs. ambient air temperature at different air velocity.

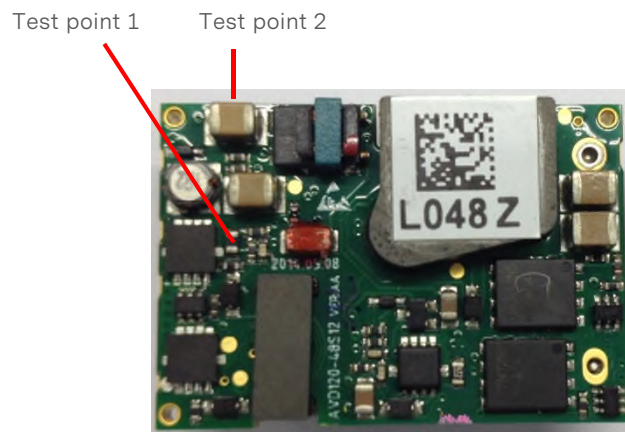


Figure 13 Temperature test point

Table 6. Temperature limit of the test point	
Test Point	Temperature limit
Test Point1	119.5 °C
Test Point2	115 °C



# ENVIRONMENTAL SPECIFICATIONS

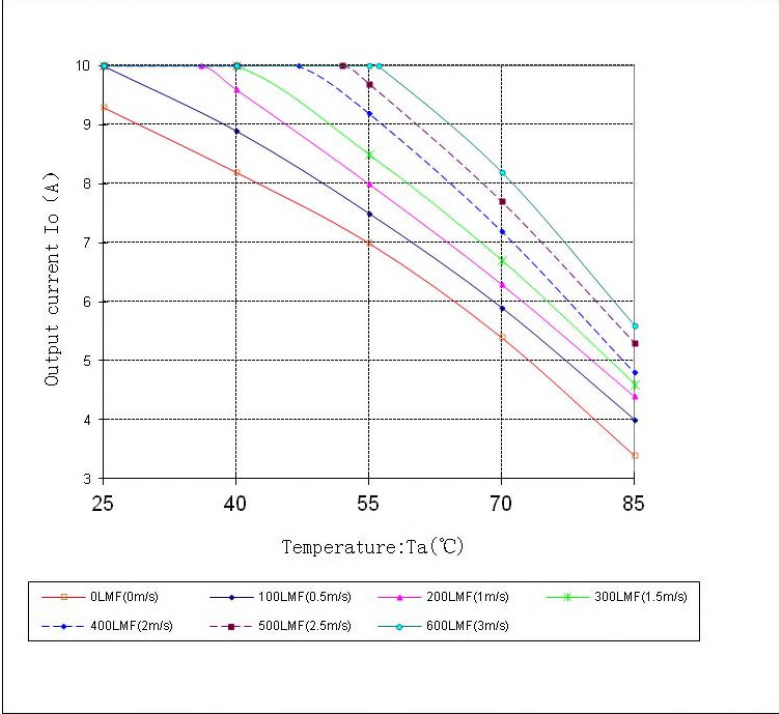


Figure 14 Derating curve

## Thermal Considerations – Baseplate module

The converter is designed to operate in different thermal environments and sufficient cooling must be provided. Proper cooling can be verified by measuring the temperature at the test points. The temperature at these points should not exceed the maximum values in Table 7.

For a typical application, forced airflow direction is from  $V_{in-}$  to  $V_{in+}$ , Figure 16 shows the derating of output current vs. ambient air temperature at different air velocity.

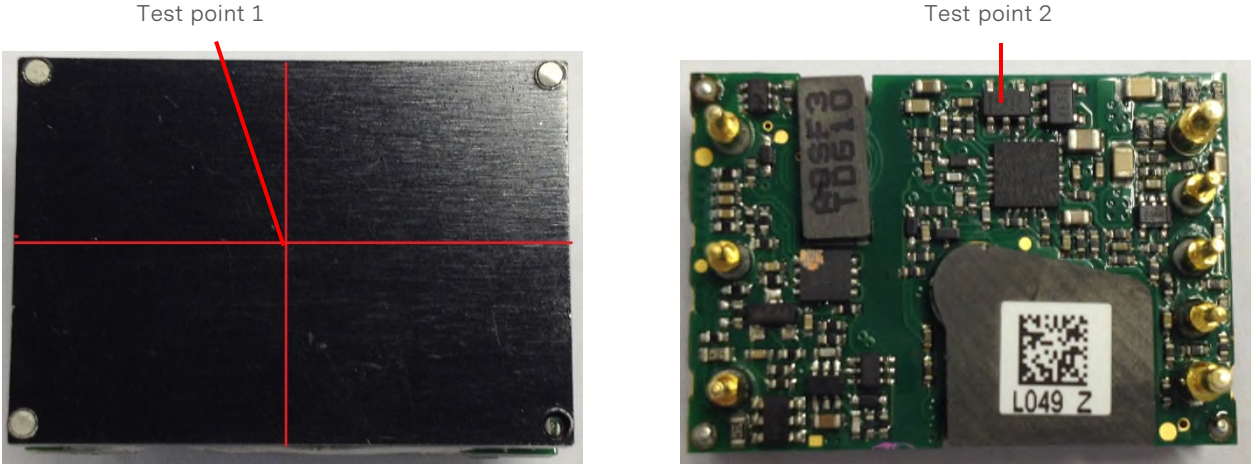


Figure 15 Temperature test point

# ENVIRONMENTAL SPECIFICATIONS

Table 7. Temperature limit of the test point	
Test Point	Temperature limit
Test Point1	107.5 °C
Test Point2	110 °C

For a typical application, forced airflow direction is from Vin- to Vin+. Figure 16 shows the derating output current vs. ambient air temperature at different air velocity with a heatsink,

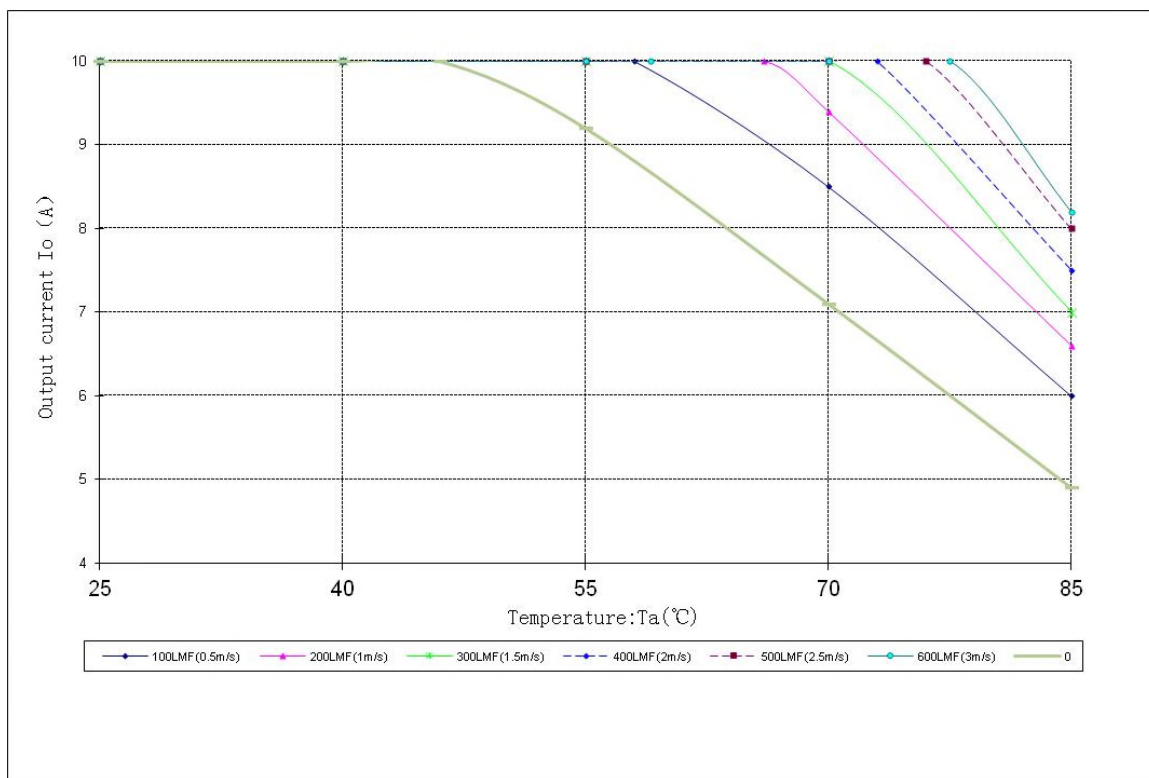


Figure 16 Derating curve

## ENVIRONMENTAL SPECIFICATIONS

### Qualification Testing

Parameter	Unit (pcs)	Test condition
Halt test	4-5	$T_{a,min}$ -30 °C to $T_{a,max}$ +25 °C, 10 °C step, $V_{in}$ = min to max, 0 ~ 100% load
Vibration	3	Frequency range: 5Hz ~ 20Hz, 20Hz ~ 200Hz, A.S.D: 1.0m <sup>2</sup> /s <sup>3</sup> , -3db/oct, axes of vibration: X/Y/Z. Time: 30min/axes
Mechanical Shock	3	30g, 6ms, 3axes, 6directions, 3time/direction
Thermal Shock	3	-55 °C to 125 °C, unit temperature 20cycles
Thermal Cycling	3	-40 °C to 85 °C, temperature change rate: 1°C/min, cycles: 2cycles
Humidity	3	40 °C, 95%RH, 48h
Solder Ability	15	IPC J-STD-002C-2007

## APPLICATION NOTES

### Typical Application

Below is the typical application of the AVD120-48S12 series power supply.

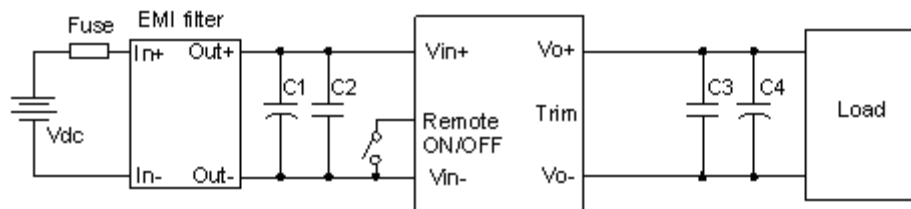


Figure 17 Typical application

C1: 220 $\mu$ F/100V electrolytic capacitor; P/N: UPM2A221MPD (Nichicon) or equivalent caps

C2, C3: 1 $\mu$ F/100V X7R ceramic capacitor, P/N: C3216X7R2A105KT0L0S (TDK) or equivalent caps

C4: 220 $\mu$ F electrolytic capacitor, P/N: UPM1E221MHD (Nichicon) or equivalent caps


Fuse: External fast blow fuse with a rating of 12A. The recommended fuse model is 21612.5P from LITTLEFUSE.

# APPLICATION NOTES


## Remote ON/OFF

Negative remote ON/OFF logic is available in AVD120-48S12. The logic is CMOS and TTL compatible.

The voltage between pin Remote ON/OFF and pin Vin- must not exceed the range listed in table “Feature characteristics” to ensure proper operation. The external Remote ON/OFF circuit is highly recommended as shown in figure 19.

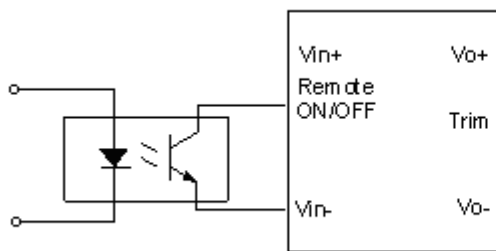

Isolated remote ON/OFF circuit

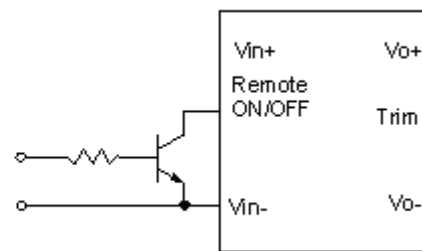

Non-isolated remote ON/OFF circuit

Figure 18 External Remote ON/OFF circuit

# APPLICATION NOTES

## Trim Characteristics

Connecting an external resistor between Trim pin and Vo- pin will decrease the output voltage. While connecting it between Trim and Vo+ will increase the output voltage. The following equations determine the external resistance to obtain the trimmed output voltage.

$$R_{adj-down} = \frac{510}{\Delta} - 10.2(K\Omega)$$

$$R_{adj-up} = \frac{5.1 \times V_{nom} \times (100 + \Delta)}{1.225 \times \Delta} - \frac{510}{\Delta} - 10.2(K\Omega)$$

$\Delta$ : Output rate against nominal output voltage.

$$\Delta = \frac{100 \times (V_{nom} - V_0)}{V_{nom}}$$

$V_{nom}$ : Nominal output voltage.

For example, to get 5.5V output, the trimming resistor is

$$\Delta = \frac{100 \times (V_{nom} - V_0)}{V_{nom}} = \frac{100 \times (5.5 - 5)}{5} = 10$$

$$R_{adj-up} = \frac{5.1 \times 5 \times (100 + 10)}{1.225 \times 10} - \frac{510}{10} - 10.2 = 167.78(K\Omega)$$

When trimming up, the output current should be decreased accordingly so as not to exceed the maximum output power.

Internal side

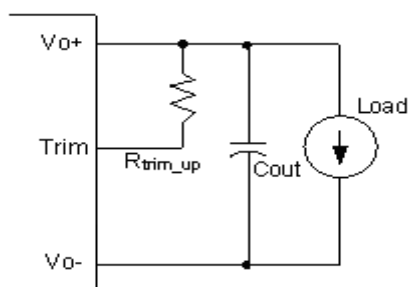


Figure 19 Trim up

Internal side

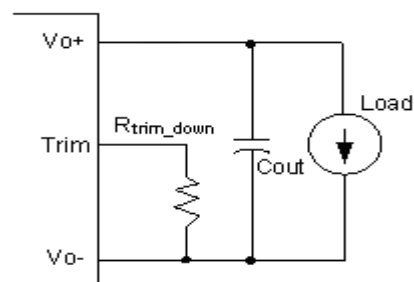


Figure 20 Trim down

## APPLICATION NOTES

### Input Ripple & Inrush Current and Output Ripple & Noise Test Configuration

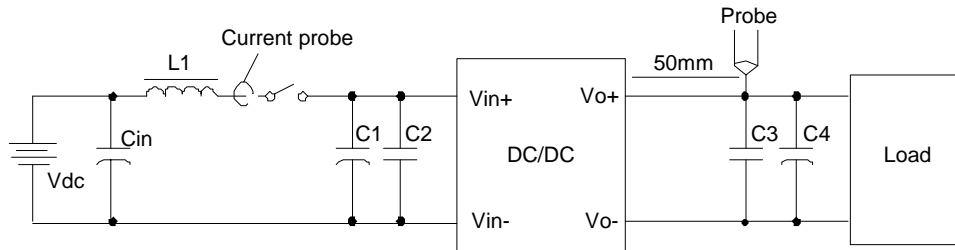


Figure 21 Input ripple & inrush current output ripple & noise test configuration

Vdc: DC power supply

L1: 12uH

Cin: 220uF/100V typical

C1: 220uF/100V electrolytic capacitor; P/N: UPM2A221MPD (Nichicon) or equivalent caps

C2, C3: 1uF/100V X7R ceramic capacitor, P/N: C3216X7R2A105KT0L0S (TDK) or equivalent caps

C4: 220uF electrolytic capacitor, P/N: UPM1E221MHD (Nichicon) or equivalent caps

Note - Using a coaxial cable with series 50ohm resistor and 0.68uF ceramic capacitor or a ground ring of probe to test output ripple & noise is recommended

# APPLICATION NOTES

## Package Information

**Package type**

moisture sensitivity level 3, moisture barrier bags.

**Minimal package QTY**

192 pcs.

**Package disassembly**

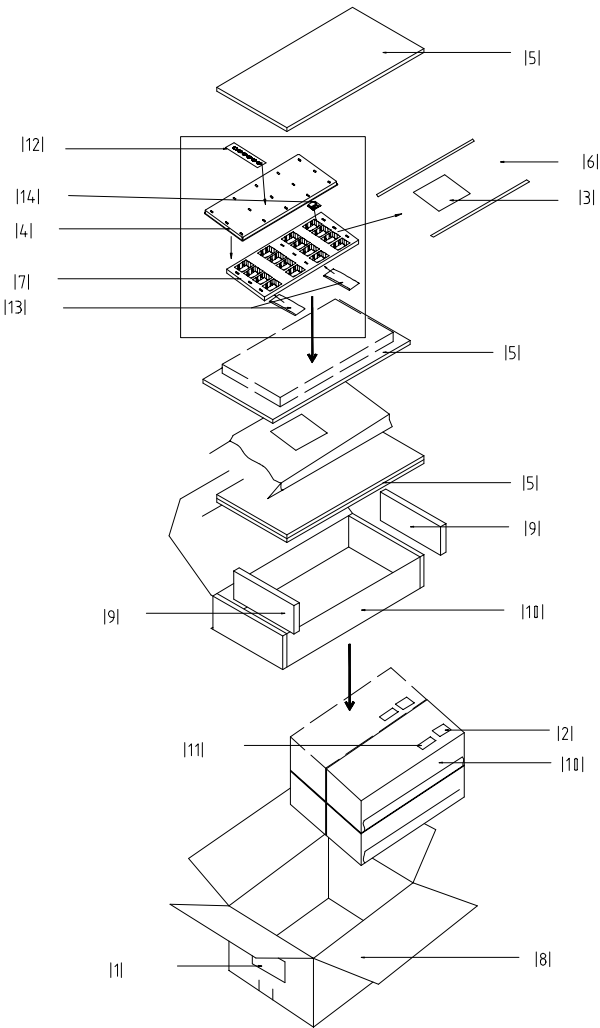


Figure 22 Package disassembly




# APPLICATION NOTES

## Package Information

Table 8. Assemblies description	
No.	Description
1	Shipping label
2	Moisture proof identification label
3	Moistureproof caution label
4	Tray cover
5	Anti-static PE foam 1
6	Moisture barrier bag
7	Tray
8	Shipping carton
9	Anti-static PE foam 2
10	Inner box
11	Model barcode label
12	Humidity indicating card
13	Desiccant
14	Model

## Package tray information

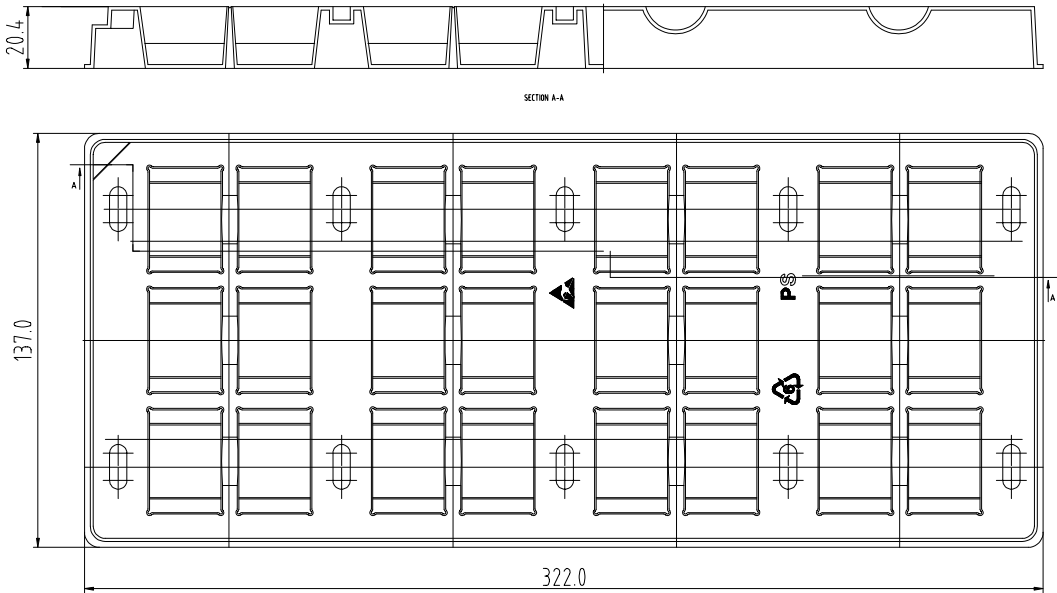

# SOLDERING INFORMATION

## Soldering

The product is intended for standard manual or wave soldering.

	Product Requirement	Product Name
R6	Wave soldering	AVD120-48S12-6L AVD120-48S12B-6L

When wave soldering is used, the temperature on pins is specified to maximum 260 °C for maximum 7s.


When soldering by hand, the iron temperature should be maintained at 300 °C ~ 380 °C and applied to the converter pins for less than 10s. Longer exposure can cause internal damage to the converter.

Cleaning of solder joint can be performed with cleaning solvent IPA or similitive.

The below products are intended for standard reflow soldering.

	Product Requirement	Product Name
R6	Reflow soldering	AVD120-48S12-6L AVD120-48S12TL

When reflow soldering is used, please refer to following fig for recommended temperature profile parameters.

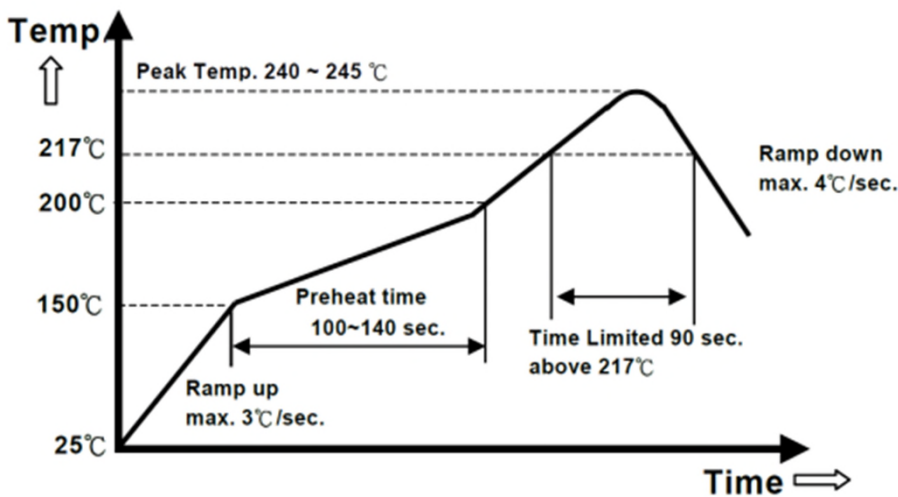

## Record of Revision and Changes

Issue	Date	Description	Originators
1.0	12.04.2014	First Issue	E. Wang
1.1	03.13.2015	Update the picture on the Page 16	E. Wang
1.2	12.01.2015	Update the C4 capacitor part number on Page 13, 19 & 22; Update AVD100 to AVD120 on Page 15	E. Wang
1.3	10.18.2016	Update mechanical drawing on Page 9, 10.	E.Wang
1.4	03.16.2016	Update Switching frequency	K. Wang
1.5	11.19.2018	Update mechanical drawing	K. Wang
1.6	12.05.2019	Update reflow description	E.Wang
1.7	02.24.2020	Update RoHS status	C.Liu
1.8	05.06.2021	Update the template	J. Zhang
1.9	05.20.2022	Update the weight information	E. Wang



For international contact information,  
visit [advancedenergy.com](http://advancedenergy.com).

[powersales@aei.com](mailto:powersales@aei.com) (Sales Support)  
[productsupport.ep@aei.com](mailto:productsupport.ep@aei.com) (Technical Support)  
+1 888 412 7832

## ABOUT ADVANCED ENERGY

Advanced Energy (AE) has devoted more than three decades to perfecting power for its global customers. AE designs and manufactures highly engineered, precision power conversion, measurement and control solutions for mission-critical applications and processes.

Our products enable customer innovation in complex applications for a wide range of industries including semiconductor equipment, industrial, manufacturing, telecommunications, data center computing, and medical. With deep applications know-how and responsive service and support across the globe, we build collaborative partnerships to meet rapid technological developments, propel growth for our customers, and innovate the future of power.

## PRECISION | POWER | PERFORMANCE

---

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2020 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy®, and AE® are U.S. trademarks of Advanced Energy Industries, Inc.